LOC Series

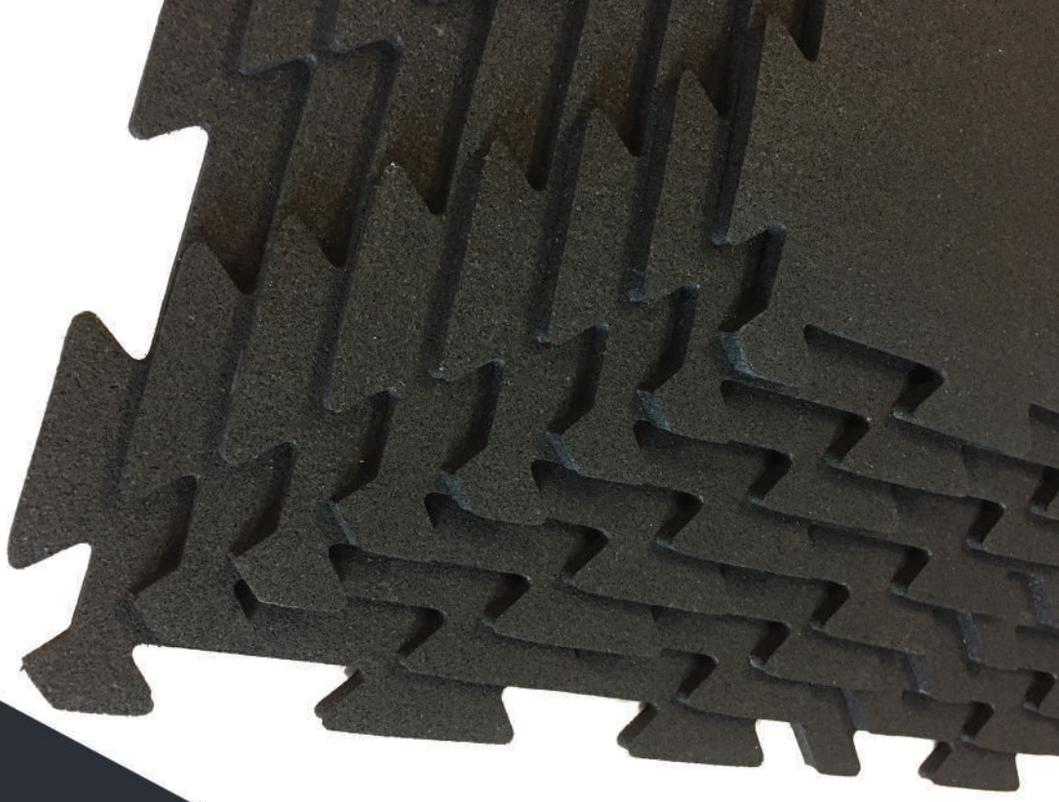

Lock Down High Quality in Minutes With LOC Series Interlocking Tiles

SEAMLESS INTERLOCK • **VIRTUALLY ODOURLESS** • **COMMERCIAL GRADE**

Recommended Applications

- *Community Centres*
- *Home Gyms*
- *Fitness & Exercise Spaces*
- *Weight Rooms*
- *Play Spaces*
- *Utility Rooms*

Features & Benefits

- *High Colour Speckle Content*
- *Quick & Easy Loose Lay Installation for Temporary or Permanent Use*
- *Precision Cut for a Virtually Seamless Finish*
- *Easy to Clean & Maintain*

DISTRIBUTED BY:

LOC Series

PERFECT RUBBER FLOORING
www.perfectrubberflooring.ca

Standard Tile Specifications

Size	Thickness	Binder
2'0" x 2'0"	5/16" (8mm)	Urethane

** custom thicknesses available*

5 YEARS WARRANTY

Coloured EPDM Granualate

1mm to 3mm

** the colour concentration of the standard tile is 30%*

LOC Series Specifications

Test Type	ASTM	Results
Shore Hardness	D-2240	65 +/- 5
Density	D-792	60-80 lbs./cu.ft.
Elongation (at break)	D-412	95%*-120%*
Tensile Strength	D-412	260-340 psi
Compression Set	D-395	-4.8%
VOC Emissions	D-5116	<0.5mg/m²
Resistance to Chemicals	F-925-02	no change
Static Load Limit	F-970	passes, 150 psi
Die-C Tear	D-624	80 min
Surfaces Flammability	D-2859	pass
Coefficient of Friction	D-1894-95	>0.8*

** varies based on colour*

***NOTE:** physical properties can vary by product type. information above applies to this product only.*

0201 Cobalt Frost

0202 Sandstone

0203 Steel Frost

0204 Midnight Black SOFT


0205 Sable Black

* Additional colours available for custom orders