


# TRUGLU 2.0

FIRM-SET, MODIFIED TRANSITIONAL  
PRESSURE SENSITIVE ADHESIVE

- ✓ IMMEDIATE ACCESS FOR LIGHT TRAFFIC
- ✓ COLOUR-CHANGE TECHNOLOGY IMPROVES INSTALL ACCURACY
- ✓ HIGH-STRENGTH, WATER-RESISTANT BOND
- ✓ PSA PERFORMANCE WITH HARD-SET RESILIENCE
- ✓ LOW VOC, LOW ODOUR

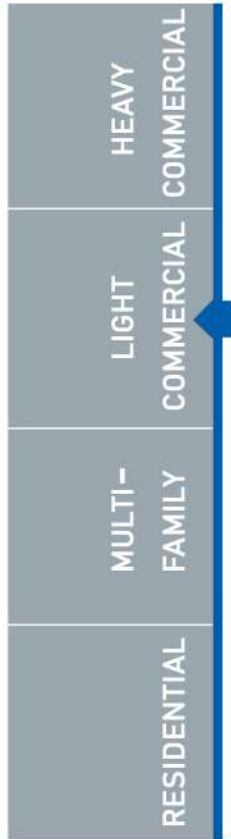

	RH 99%		pH 5-12		MVER 12lbs		FLASH TIME 30-60 min		WORKING TIME 12 hours		CURE TIME 12 hours
--	-----------	--	------------	--	---------------	--	----------------------------	--	-----------------------------	--	--------------------------

	LIGHT TRAFFIC 0 mins		HEAVY TRAFFIC 24 hours		ROLLING LOADS 48 hours
--	----------------------------	--	------------------------------	--	------------------------------

## TOOL MEASUREMENTS : WIDTH x DEPTH x SPACING

1/16" x 1/16" x 1/16"  
Sq Notch  
150-180 sf/gal

**RESILIENT:** Rubber (rolls, sheets, mats), Modular (LVP/LVT [porous], rigid core [dryback]), Stair Treads (rubber/vinyl [porous]), Sheet (heterogeneous/homogeneous [porous])  
**WOOD:** Cork (cork-based hard surface, underlayment)  
**CARPET:** Broadloom (6' vinyl-backed, double-stick-cushion-to-substrate), Modular (hard-backed/soft-backed [porous], walk-off)

3/8" Short Nap Paint  
Roller  
up to 350 sf/gal

**RESILIENT:** Sheet (fibreglass)  
**CARPET:** Modular (hard-backed)

1/8" x 1/8" x 1/16"  
U Notch  
50-65 sf/gal

**CARPET:** Broadloom (double-stick-carpet-to-cushion, unitary, woven-backed)

1/16" x 1/32" x 1/32"  
U Notch  
220-260 sf/gal

**RESILIENT:** Modular (LVP/LVT [non-porous], SVT, VCT, VET), Sheet (heterogeneous/homogeneous [non-porous]), Stair Treads (rubber/vinyl [non-porous])  
**CARPET:** Modular (hard-backed/soft-backed [non-porous])

1/8" x 1/8" x 1/16"  
V Notch  
90-120 sf/gal

**CARPET:** Broadloom (Action-Bac, jute-back, hot-melt-back, HP- & vinyl-backed, polyurethane, rubber-backed, unitary Action-Bac)

